

75% DIN

40 m T	K: 0°
7.2-5.0m	15.8m


TAB 95015

01.00

0022925


CODE >111<

TB95 0011 .x(x)




m	m > t		
	30,9	37,6	40,0
9,0	4,6		3,5
10,0	4,6	3,9	3,5
12,0	4,1	3,9	3,5
14,0	3,7	3,7	3,4
16,0	3,4	3,4	3,3
18,0	3,1	3,2	3,1
20,0	2,9	3,0	2,9
22,0	2,8	2,8	2,7
24,0	2,6	2,7	2,5
26,0	2,5	2,6	2,2
28,0	2,4	2,5	2,0
30,0	2,3	2,4	1,8
32,0	2,2	2,2	1,6
34,0	2,1	1,9	1,4
36,0	2,0	1,7	1,3
38,0	1,8	1,4	1,2
40,0	1,7	1,2	1,0
42,0	1,6	1,0	0,9
44,0		0,8	0,8

* n * 1 1 1



%	0	92	100
1	0	92	100
2	92	92	100
3	92	92	100
4	92	92	100



m/s	9,0	9,0	9,0
	9,0	9,0	9,0

40 m T	K: 0°
7.2-5.0m	15.8m



13.0
t



8.1 x
7.2
m



360°


40 m T	K 0°
7.2-5.0m	15.8m

TAB 95015 01.00

0022925


CODE >111<

TB95 0011 .x(x)




m	m > 1		
	30.9	37.5	40.0
9.0	4.6		
10.0	4.6	3.9	3.5
12.0	4.1	3.9	3.5
14.0	3.7	3.7	3.4
16.0	3.4	3.4	3.3
18.0	3.1	3.2	3.1
20.0	2.9	3.0	2.9
22.0	2.8	2.8	2.7
24.0	2.6	2.7	2.5
26.0	2.5	2.6	2.2
28.0	2.4	2.5	2.0
30.0	2.3	2.4	1.8
32.0	2.2	2.2	1.6
34.0	2.1	1.9	1.4
36.0	2.0	1.7	1.3
38.0	1.8	1.4	1.2
40.0	1.7	1.2	1.0
42.0	1.6	1.0	0.9
44.0		0.8	0.8

* n * 1 1 1



1	0	92	100
2	92	92	100
3	92	92	100
4	92	92	100

%





9.0	9.0	9.0
-----	-----	-----

m/s

	40 m T 7.2-5.0m	K 0° 15.8m	13.0 t	8.1 x 7.2 m	360°		
--	--------------------	---------------	-----------	-------------------	------	--	--

**Die Maße.
Dimensions.
Encombrement.**

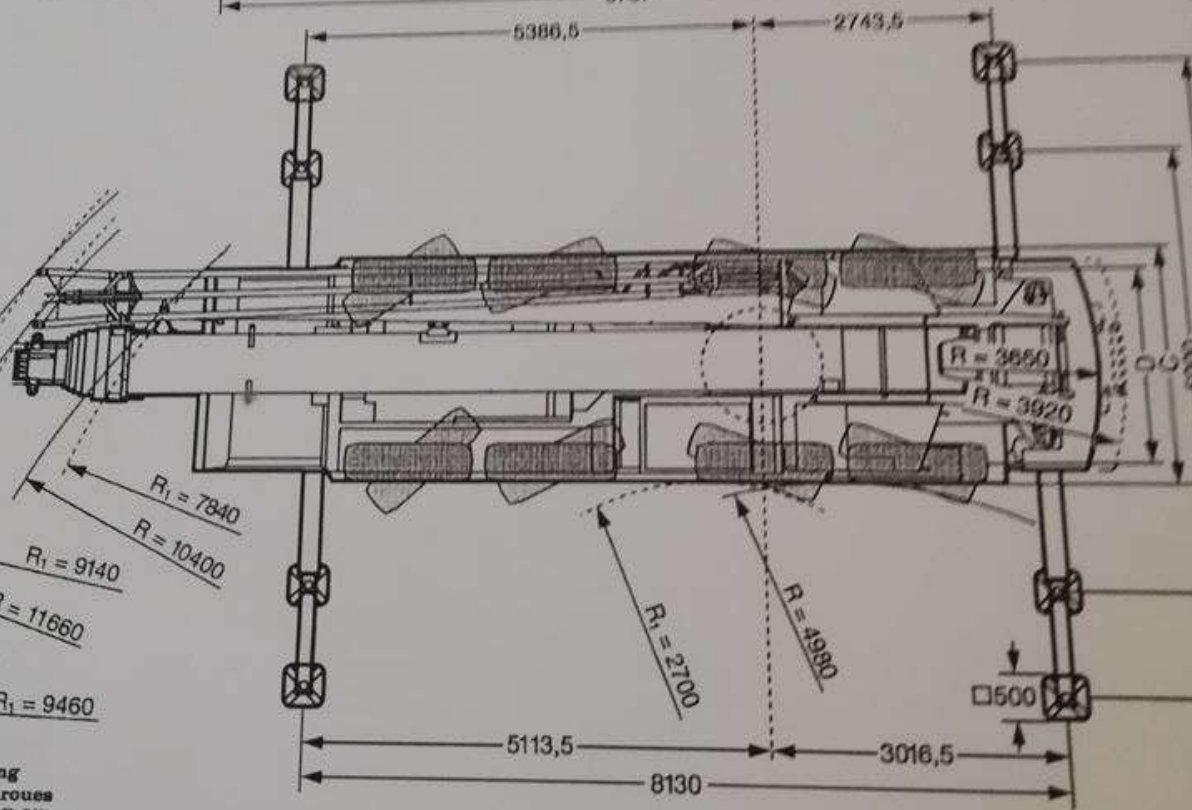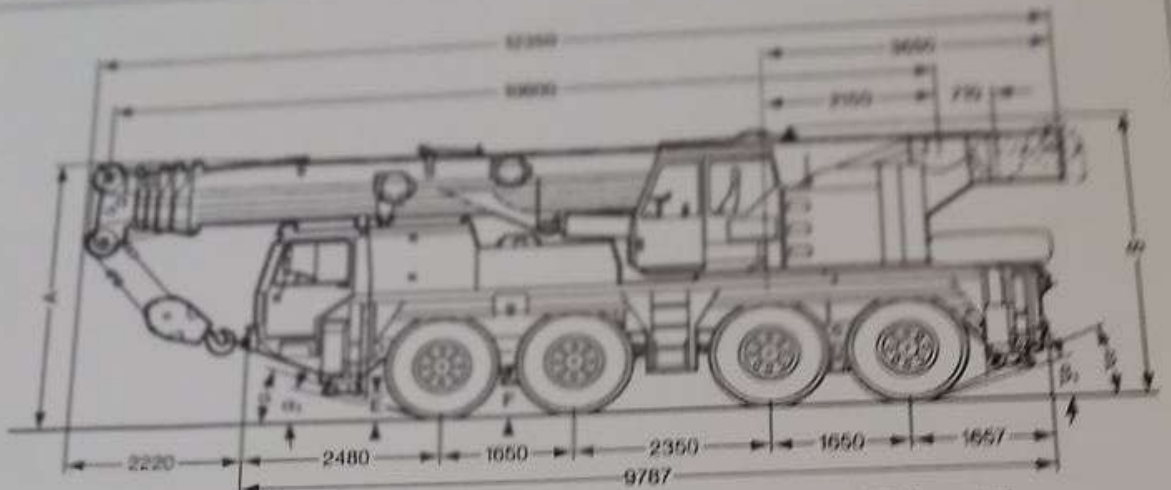


R_1 = Allradlenkung
All-wheel steering
Direction toutes roues
() = Bereifung 16.00 R 25
Tyres 16.00 R 25
Pneumatiques 16.00 R 25


	Maße / Dimensions / Encombrement mm										
	A	A 100 mm*	B	C	D	E	F	α	α_1	β	
14.00 R 25	3750	3600	3800	2500	2123	280	410	21°	15°	22°	
16.00 R 25	3800	3650	3850	2700	2235	330	460	23°	17°	24°	

* abgesenkt / lowered / abaissé

**Die Maße.
Dimensions.
Encombremment.**


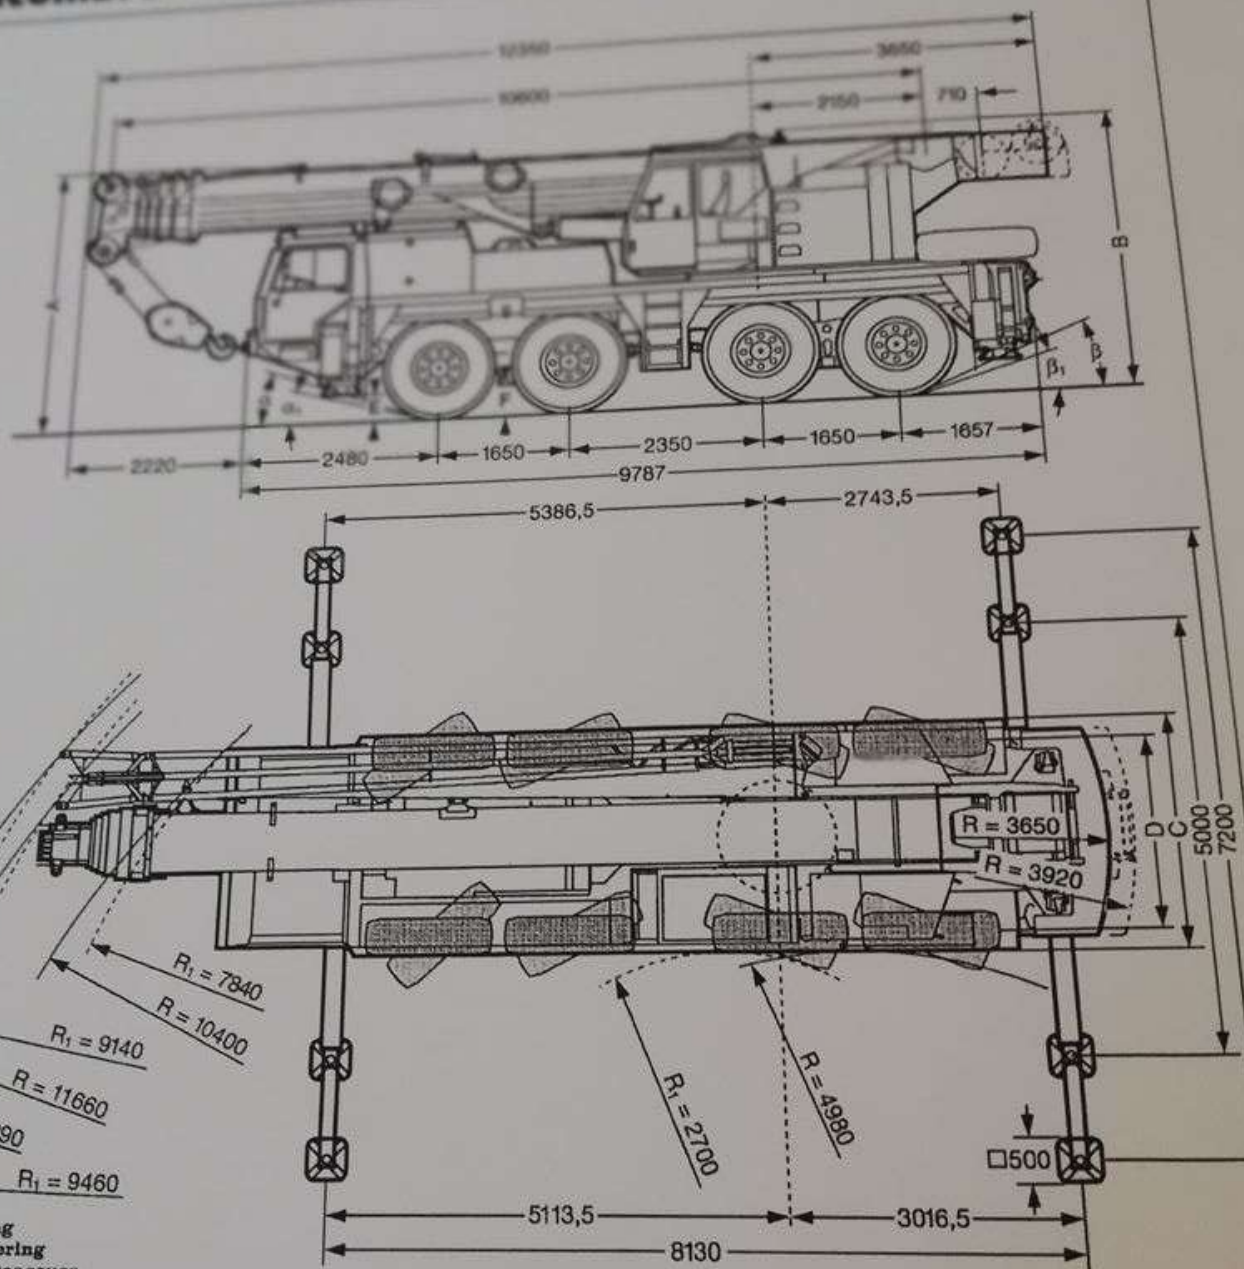


R_1 = Allradlenkung
All-wheel steering
Direction toutes roues
() = Bereifung 16.00 R 25
Tyres 18.00 R 25
Pneumatiques 18.00 R 25

	Maße / Dimensions / Encombremment mm										
	A	A 100 mm*	B	C	D	E	F	α	α_1	β	β_1
14.00 R 25	3750	3600	3800	2500	2123	280	410	21°	15°	22°	18°
16.00 R 25	3800	3650	3850	2700	2235	330	460	23°	17°	24°	20°

* abgesenkt / lowered / abaissé

**Die Maße.
Dimensionen.
Encadrement.**

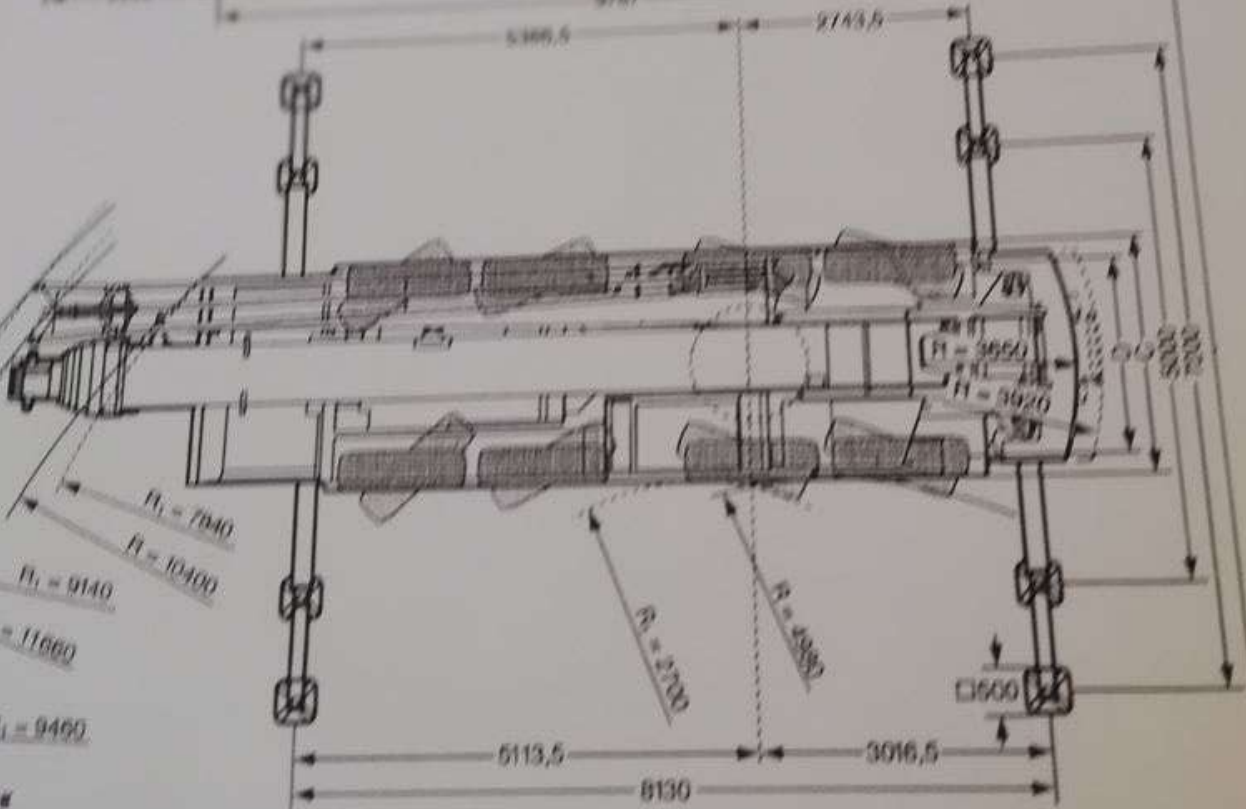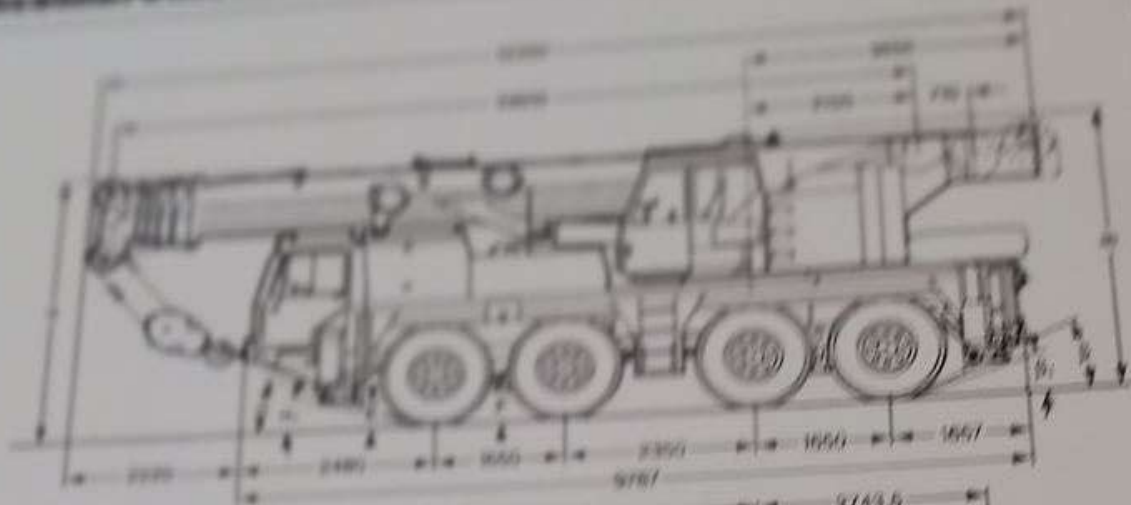


Allradlenkung
All wheel steering
Direction toutes roues
Bereifung 16.00 R 25
Tyres 16.00 R 25
Pneumatiques 16.00 R 25

●	Maße / Dimensions / Encadrement mm										
	A	A 100 mm*	B	C	D	E	F	α	α ₁	β	β ₁
14.00 R 25	3750	3600	3800	2500	2123	280	410	21°	15°	22°	18°
16.00 R 25	3800	3650	3850	2700	2235	330	460	23°	17°	24°	20°

● / lowered / abaissé

**Die Hubhöhen.
Lifting heights.
Hauteurs de levage.**

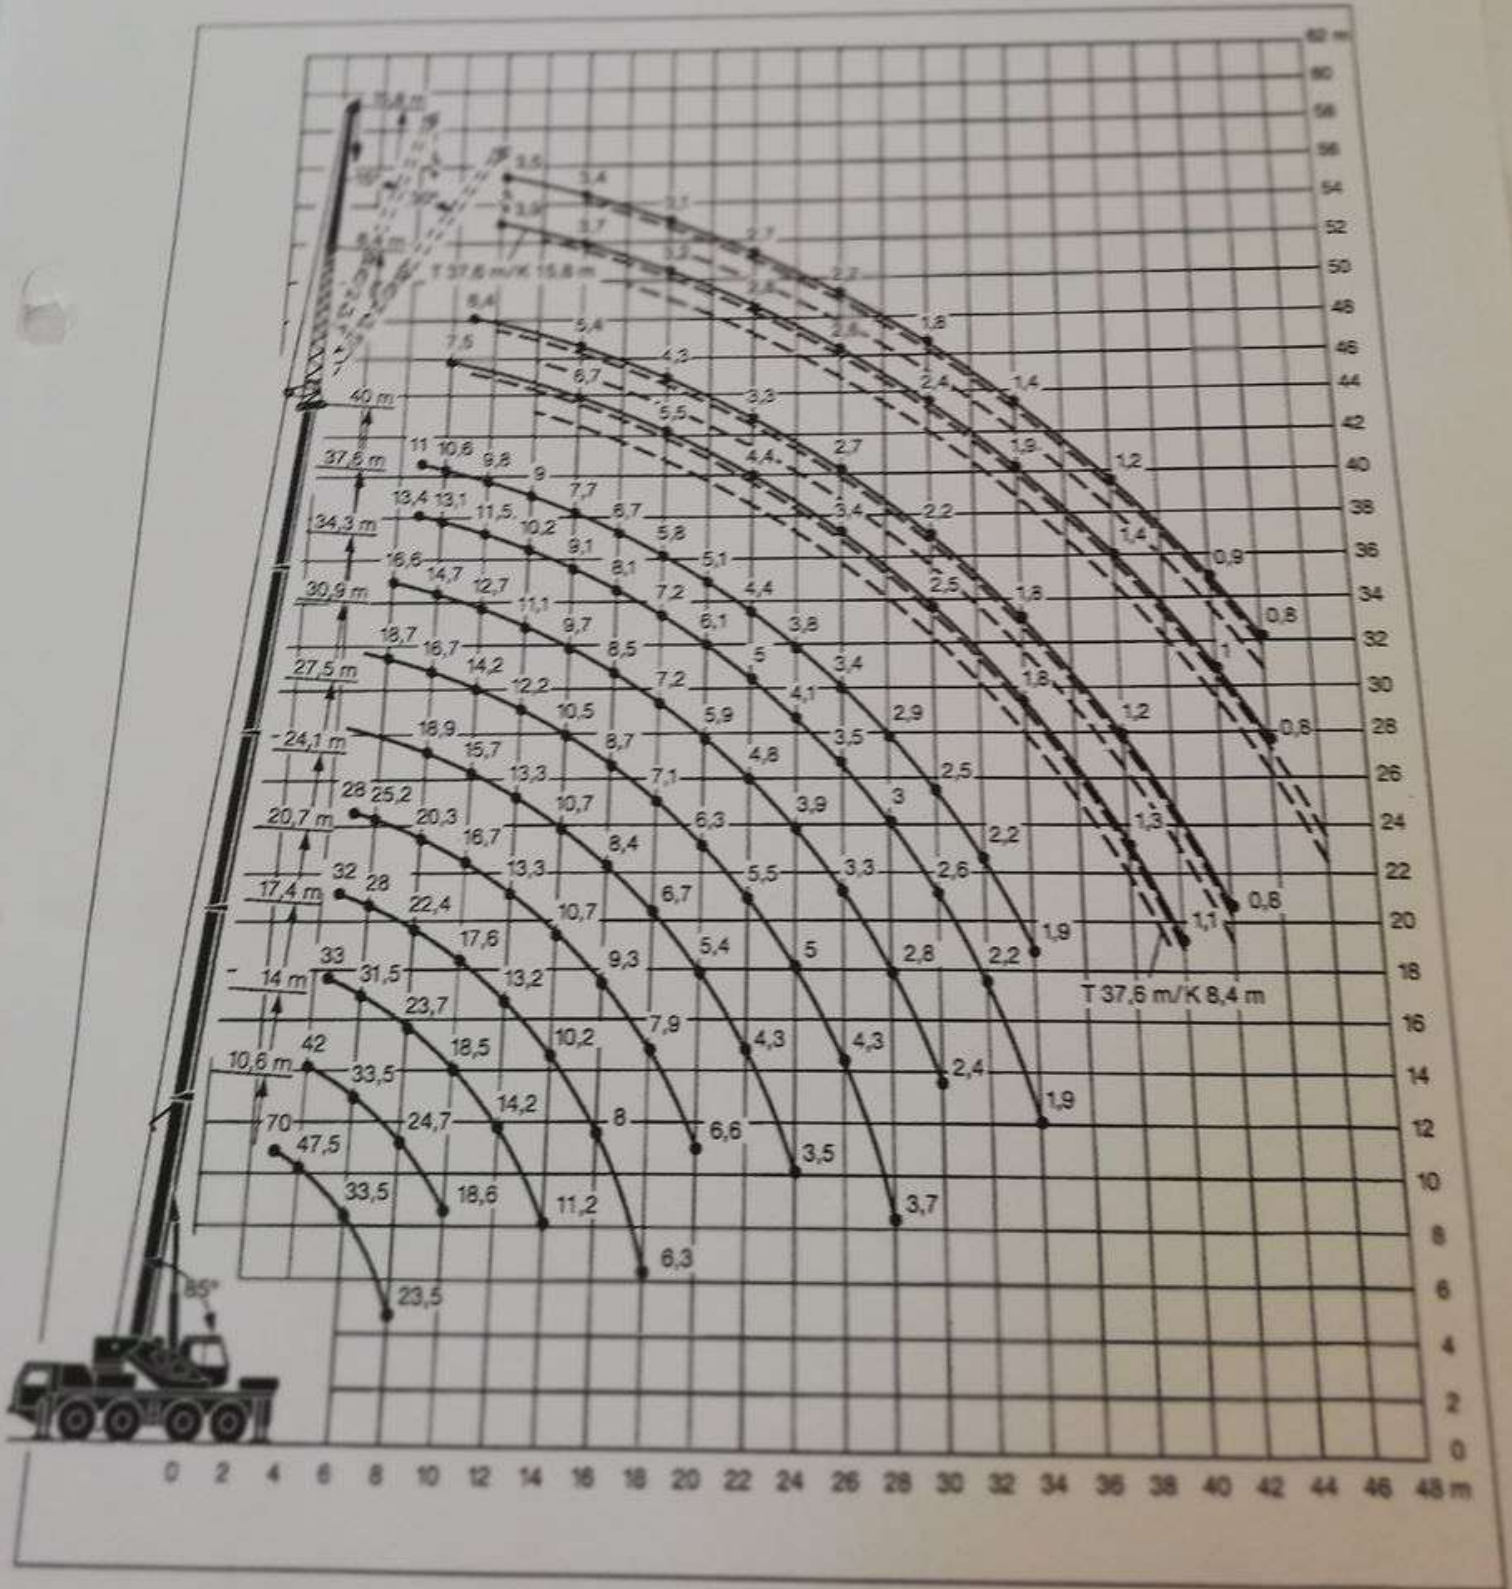

SPIN TRUCK

